

A joint initiative of the ETH domain and Swiss Federal Offices









2nd International ecoinvent Meeting Lausanne, March 14, 2008

Swiss Centre For Life Cycle Inventories A joint initiative of the ETH domain and Swiss Federal Offices

metals treatment and compressed air supply

Rolf Frischknecht, Roland Steiner ESU-services Ltd.



🚺 ART

Contents

- · Overview of processes analysed
- General modelling principles
- · Description of life cycle inventories of machine processing
- Conclusions



Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices









Presentation: Rolf Frischknecht



Overview of processes analysed

- Average machine processing
- Degreasing of metal surfaces
- Chipping

3

- Laser machining
- Chippless shaping
- · compressed air supply



Swiss Centre For Life Cycle Inventories













Modelling principles: capital equipment

- eco nvent Centre
- factory infrastructure:

 demand of a share of capital equipment included in all
 machining datasets
- Swiss Centre For Life Cycle Inventories
- exception "laser machining":
 no factory hall demand included, as no correlation between machining hours and factory infrastructure

A joint initiative of the ETH domain and Swiss Federal Offices

-CPF

©EMPA

ETH



 exception "compressed air supply": considered ancillary process (e.g., to metals machining) in a factory

Presentation: Rolf Frischknecht



Modelling principles: Degreasing



- machining datasets do NOT include degreasing Reason:
 - machining is per mass (or time in the case of laser machinig)
 - degreasing is per surface
- "surface to mass" ratio must be known
- practitioner needs to add degreasing dataset to each individual machining dataset

Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices













5

Modelling principles: Reference unit and material input

eco nvent Centre

- chipping datasets:
 - per kg material removed
 - material removed is an input
- · chipless shaping:
 - per kg material processed
 - no material input
- · laser machining:
 - per hour processing
 - no material input (a few mg/sec)
- · compressed air supply:
 - per m³ comp. air supplied (including losses in the network)
 - per m³ comp. air produced

Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices











Presentation: Rolf Frischknecht



Average machine processing

- average product manufacturing:
 - steel

7

- chromium steel
- aluminium
- copper
- metal (82.4/2.0/3.3/12.2 %)
- additional datasets:
 - machine (manufacturing)
 - machine operation
 - factory (construction)
 - factory operation
 - metal input



Swiss Centre For Life Cycle Inventories













Inventory data

- Data from 8 mechanical processing machines
- Average capacity about 8'000 tons from 44 to 210'000 tons capacity
- data from 2003 to 2006
- data includes
 - solvents, consumption
 - solvents, emission: 0.56g/kg metal product
 - lubricating oil
 - compressed air
 - thermal energy
 - electricity

9



Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices









Presentation: Rolf Frischknecht



machine and factory

- manufacture data:
 based on the same 8 machines
- factory operation: ancillary energy consumption, water consumption and wastes generated
- metal working factory:
 - includes building hall and land use
 - data based on three manufacturers



Swiss Centre For Life Cycle Inventories













Degreasing of metals

- eco nvent
- industry data from European household device manufacturer
- inventory data includes:
 - electricity
 - thermal energy
 - industrial cleaning detergents
 - sodium chloride
 - sulphuric acid
 - water

Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices











Presentation: Rolf Frischknecht



Turning

11

- Two phases in treatment: roughing, dressing and average
- Two different technologies: conventional and CNC (Computerized Numerical Control)
- Five different metals: steel, NiCr-steel, cast iron, aluminium, brass
- Inventory data:
 - electricity
 - compressed air (CNC only)
 - lubricating oil (CNC only)
 - factory (operation and construction)
 - amount of metal removed



Swiss Centre For Life Cycle Inventories

















Results: ecological scarcity 06



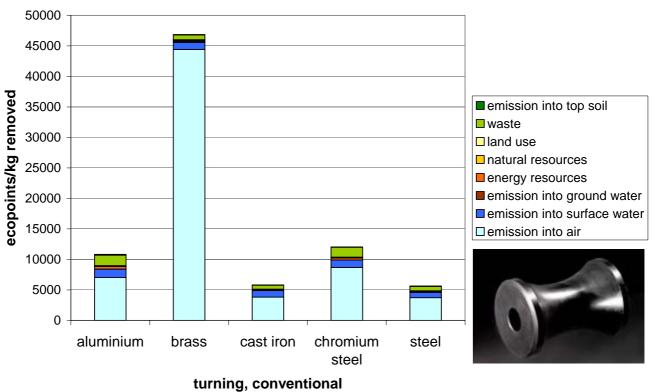

Contributions: ecological scarcity 06



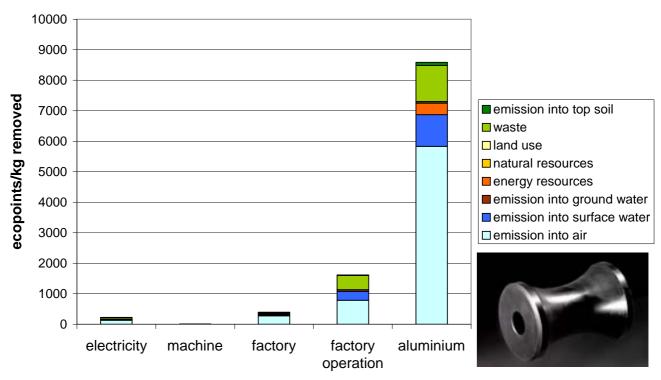

turning, conventional

Drilling

- Two different technologies: conventional and CNC
- Five different metals:
 steel, chromium steel, aluminium, copper, brass
- Inventory data:
 - electricity
 - compressed air (CNC only)
 - lubricating oil (CNC only)
 - capital equipment
 - factory operation
 - amount of metal removed



Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices












Presentation: Rolf Frischknecht




15

Results: ecological scarcity 06

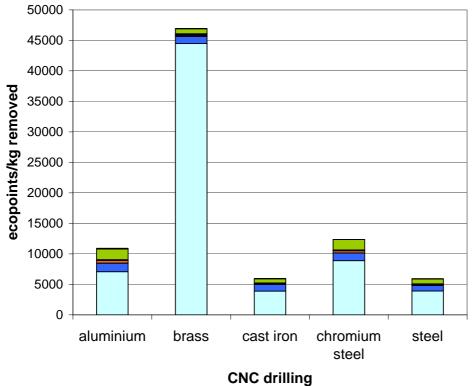





emission into top soil

■ natural resources

energy resources

■ waste

□ land use

Milling

- Four different process modes:
 large and small parts, dressing and average
- Four different metals: steel, chromium steel, cast iron, aluminium
- · Inventory data:
 - electricity

17

- compressed air
- lubricating oil
- amount of metal removed





Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices










Presentation: Rolf Frischknecht




Results: ecological scarcity 06

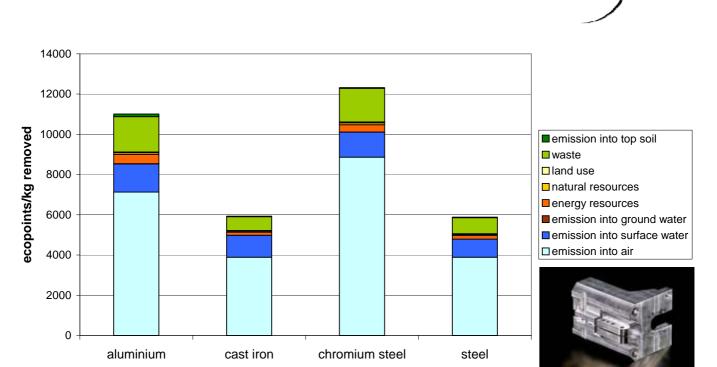

milling, average

Contributions: ecological scarcity 06



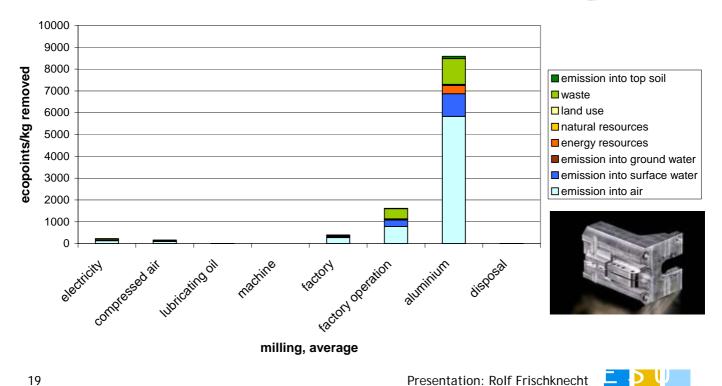

Laser machining of metals


- Two different laser systems:
 - YAG (Yttrium-Aluminium garnet)
 - CO₂
- Different laser sizes:
 - YAG: 30, 40, 50, 60, 120, 200, 330, 500 W
 - CO₂: 2, 2.7, 3.2, 4.0, 5.0, 6.0 kW
- Total operation time:
 - YAG: 2 hours/day; 5 days/week; 15 years
 - CO₂: 12 hours/day; 5 days/week; 15 years



Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices







Laser machining: inventory data

econvent

- YAG laser systems:
 - electricity
 - cooling water (larger units only)
 - air emissions of particulates, NO_χ , and ozone
 - machine manufacture
- CO₂ laser systems:
 - electricity
 - industrial gases (helium, nitrogen, carbon dioxide)
 - air emissions of helium, particulates, NO_X, CO₂, and ozone
 - machine manufacture

Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices










Presentation: Rolf Frischknecht



Results: ecological scarcity 06

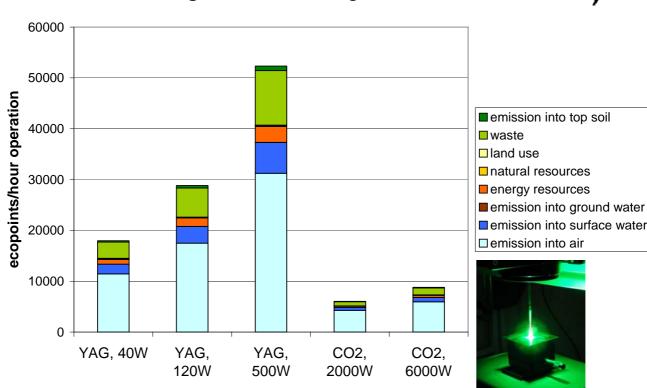


laser machining of metal

21

Contributions: ecological scarcity 06



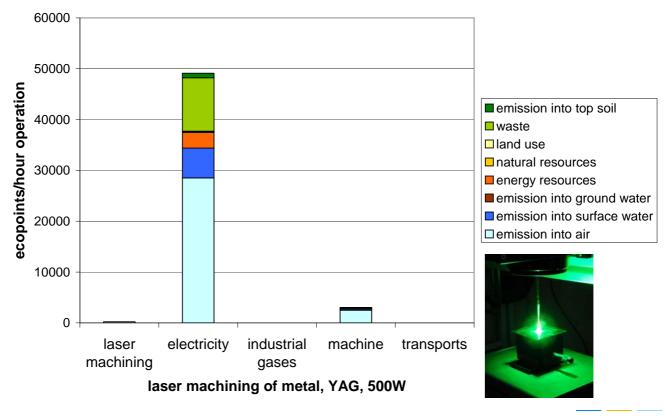

Impact extrusion

- Three different levels of temperature: cold (T/ T_{melt} < 0.3), warm, hot (T/ T_{melt} > 0.6)
- two different metals:
 - steel
 - aluminium (cold IE only)
- Datasets on
 - surface treatment (cold IE only)
 - warming (warm/hot IE only)
 - deformation stroke
 - 1 to five stroke treatments
- Inventory data: energy inputs, capital equipment and factory operation



Swiss Centre For Life Cycle Inventories












Results: ecological scarcity 06



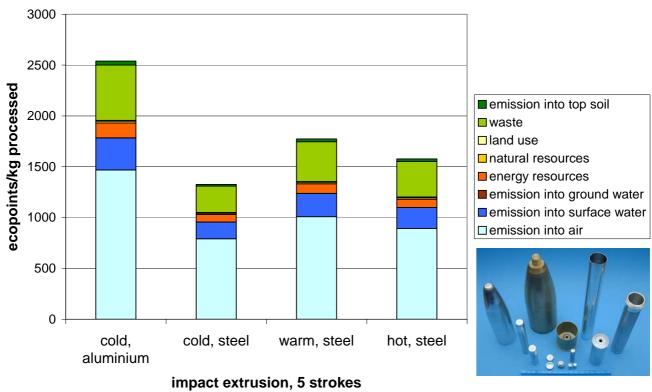

Contributions: ecological scarcity 06 1800 1600 ecopoints/kg processed 1400 emission into top soil waste 1200 □land use 1000 ■ natural resources energy resources 800 memission into ground water 600 emission into surface water emission into air 400 200 0

impact extrusion, aluminium, 5 strokes

Deep drawing

- Two different modes: single stroke and continuous
- Different press sizes:
 650, 3'500, 10'000, 38'000 kN
- one metal: steel
- Inventory data:
 - electricity,

27

- compressed air
- capital equipment
- factory operation



Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices












Presentation: Rolf Frischknecht



Compressed air supply

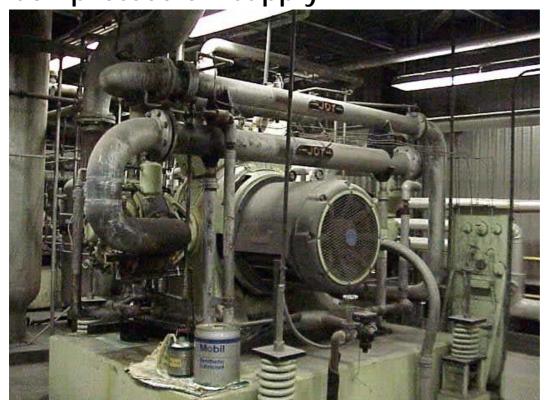



Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices













Compressed air supply system

- compressor
- compressed air storage container (opt.)
- dryer (opt.)
- filter (opt.)
- pipe network (for distribution)
- consumer devices



Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices









Presentation: Rolf Frischknecht



Drivers of electricity consumption

leakage rate

29

- pressure level
- · appropriateness of control settings
- size of compressor

increase in electricity consumption due to filter and dryer:

small installations: 5 %

large installations: 3 %



Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices













Compressors installed in Switzerland



	power in kW				
	<3	3-15	18-90	>90	total
installed compressors	110'000	30,000	8,000	800	148'000
	74 %	20 %	5 %	1 %	
electricity consumption [GWh]	11	150	400	200	671
	1 %	20 %	53 %	26 %	

wiss Centre or Life Cycle ventories ioint initiative of the










Presentation: Rolf Frischknecht



Key figures compressors & network



31

32

750 hours per year

machine weight:

140 kg (35 kg/kW) 4 kW: 300 kW: 4600 kg (15 kg/kW)

increase in electricity consumption due to filter and dryer:

- small installations: 5 %

- large installations: 3 %

pipe diameter: 100 mm

network length: 4'500 m

100 mg steel (large), 34 mg aluminium (small) per Nm³



Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices













Datasets available

- Two different compressor sizes: <30 kW, >30 kW
- Three different pressure levels:

- <30 kW: 8, 10, 12 bar

- >30 kW: 6, 7, 8 bar

- Three different technology levels:
 - average

33

- optimised
- best generation (>30 kW only)



Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices










Presentation: Rolf Frischknecht



Electricity consumption

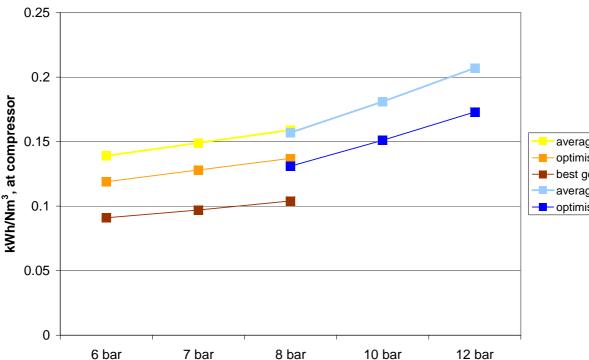



average, large optimised, large

best generation, large average, small

--- optimised, small

Inventory data

leakage rate > 30 kW:

30 % - average:

- optimised: 15 %

- best generation: 10 %

leakage rate < 30 kW:

50 % - average:

- optimised: 5 %

lubricating oil:

35

- small: 10 mg / Nm³

2.1 mg / Nm³ - large:



Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices












Presentation: Rolf Frischknecht



Results: cumulative energy demand




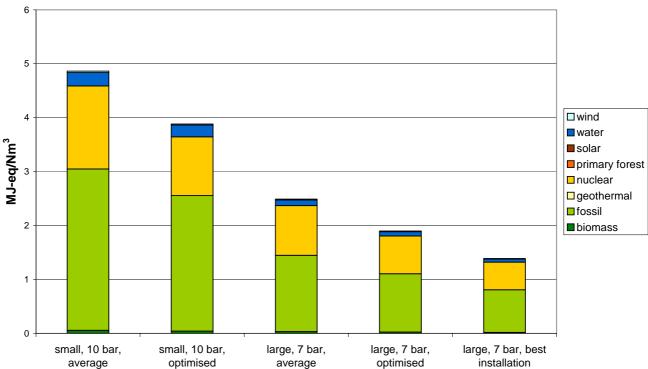

compressed air, supplied

Results: ecological scarcity 06



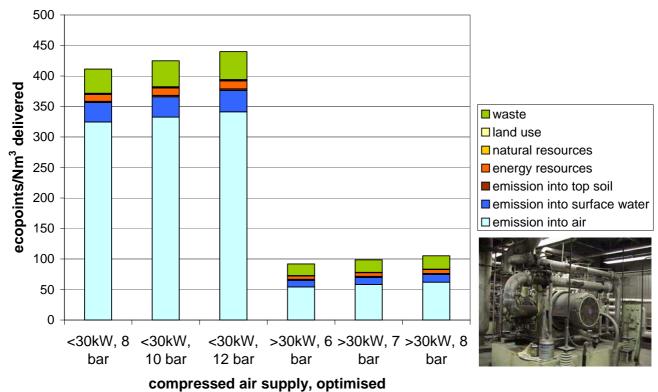

Contributions: ecological scarcity 06 90 80 ecopoints/Nm³ produced 70 emission into ground water waste 60 □ land use 50 ■ natural resources energy resources 40 emission into top soil 30 emission into surface water 20 emission into air 10

compressed air supply, big, 7 bar

Conclusions

- chipping processes: production of material removed is dominant
- chipless shaping: deformation energy and general factory operation are most important
- laser machining dependent on power needed
- compressed air: substantial difference particularly between average, optimised and best
- metal machining datasets do not include degreasing => add it separately

Swiss Centre For Life Cycle Inventories

A joint initiative of the ETH domain and Swiss Federal Offices











Presentation: Rolf Frischknecht



39



Rolf Frischknecht frischknecht@esu-services.ch



Swiss Centre For Life Cycle Inventories











